



# CSK™

## LED MR16 Lamp 50w halogen replacement



### Specifications

Parameter	Unit	Specs.			
Power Consumption	W	8			
Operating Voltage	V	AC / DC 12			
Color Temperature	K	2,700	3,500	4,000	5,000
Luminous Flux	lm	580	620	630	650
Luminous Efficacy	lm/W	72.5	77.5	78.7	81
Color Rendering Index	Ra	80			
Beam Angle	deg.	40			
Lifetime	Hrs.	25,000			
Dimension	mm	Ø50 × 46			
Base	-	GU 5.3			
Weight	g	56			




## Applications

- Interior commercial lighting
- Entertainment lighting
- Down lighting
- Display lighting
- Accent lighting

## Features

- Electronic transformer compatible
- Dimmable with Triac Dimmers

## Beam profile

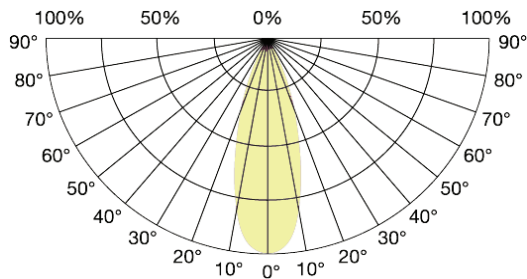

## Model no.

Model no.	Color TEMP.
CSM-GG27K-408IUA	2700K
CSM-GG35K-408IUA	3500K
CSM-GG40K-408IUA	4000K
CSM-GG50K-408IUA	5000K

## Compatibility matrix

TRANS-FORMER		HATCH				FULHAM	LIGTECH		SEAGULL
		RS12-15M (ND)	RS12-60M	RS12-75M (ND)	RS12-300	PET-120-12-60	LET60	LET75	96223S-15
DIMMER									
NO DIMMER		△ (TR NOISE)	○	△ (TR NOISE)	○	○	○	○	○
LUTRON	SELV-30 0P-WH	-	○	○	○	○	○	○	○
	RRD-6N A-WH	-	△ (SHIMMER)	-	X	△ (SHIMMER)	△ (FLICKER)	△ (FLICKER)	△ (SHIMMER)
	SLV-600 P-WH	-	X	-	X	○	○	X	X
LEVITON	IPE04-1L Z	-	X	-	X	○	○	○	△ (SHIMMER)
COOPER	9531AW	-	X	-	X	X	X	X	X
	DE06P-W	-	X	-	X	X	X	X	△ (SHIMMER)